


High Efficiency 12 mil ThinGaN LED (506 nm)
Lead (Pb) Free Product - RoHS Compliant

ODV12RG

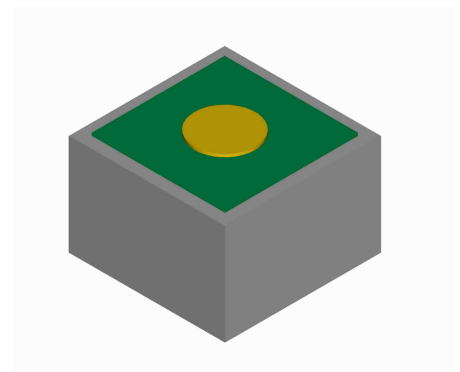

Draft Version

Features

- High efficiency due to new ThinGaN concept
- Lambertian Emission pattern
- Polarity: n-side up
- Wavelength (typ.): 506 nm
- Technology: ThinGaN
- Grouping parameters: luminous intensity, wavelength

Here you can find important REACH information of OSRAM Opto Semiconductors' products:

http://www.osram-os.com/osram_os/EN/Products/REACH

Please also note the special information in the section „Handling and storage conditions“ on page 7.

Type	Ordering Code	Description
ODV12RG	t.b.d.	12 mil high efficiency ThinGaN chip

Electrical values¹⁾ ($T_A = 25\text{ °C}$, correlated to TO18 package)

Parameter	Symbol	Value ²⁾			Unit
		min.	typ.	max.	
Dominant wavelength $I_F = 20\text{ mA}$, $t_p = 30\text{ms}$	λ_{dom}	500		511	nm
Reverse voltage $I_R = 10\mu\text{A}$	V_R	5			V
Forward voltage $I_F = 20\text{ mA}$, $t_p = 30\text{ ms}$	V_F	2.7		3.6	V
Luminous intensity $I_F = 20\text{ mA}$, $t_p = 30\text{ ms}$	I_v	690			mcd

¹⁾ *Measurement limits describe actual settings and do not include measurement uncertainties. Each wafer and fragment of a wafer is subject to final testing. The wafer or its pieces are individually attached on foils (rings). All el. values are referenced to the vendor's measurement system (correlation to customer product(s) is required). Measurement uncertainty +/-15% for brightness, +/- 1nm for wavelength and +/- 0.1V for voltage.*

²⁾ *Due to the special conditions of the manufacturing processes of LED, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.*

Maximum Ratings¹⁾

Parameter	Symbol	Value	Unit
Maximum operating temperature range	T_{op}	-40...+100	°C
Maximum forward current ($T_A = 25^\circ\text{C}$)	I_F	50	mA
Minimum forward current ($T_A = 25^\circ\text{C}$)	I_F	5	mA
Maximum surge Current ($T_A = 25^\circ\text{C}$) $t_p = 10 \mu\text{s}$, $D = 0.05$	I_{peak}	0.4	A
Maximum junction temperature	T_j	125	°C

¹⁾ *Maximum ratings are strongly package dependent and may differ between different packages. The values given represent the chip in an OSRAM Opto Semiconductor's Power TOPLED package.*

Mechanical values¹⁾

Parameter	Symbol	Value ²⁾			Unit
		min.	typ.	max.	
Length of chip edge (x-direction)	L_x	0.255	0.28	0.305	mm
Length of chip edge (y-direction)	L_y	0.255	0.28	0.305	mm
Diameter of the wafer	D		100		mm
Die height	H	170	190	210	μm
Diameter of bondpad	d	80	90	105	μm

Additional information

Metallization frontside	Gold partial
Metallization backside	Gold
Die bonding	Epoxy bonding

¹⁾ All chips are checked according to the following procedure and the OSRAM OS specification of the visual inspection A63501-Q0002-N001-*-76G3:


Unless otherwise described below, the quality level of the final visual inspection shall comply to an AQL 0,4 (according MIL-STD-105E, level II), if the customer performs an incoming visual inspection of a shipment. The quality inspection (final visual inspection) is performed by production. An additional visual inspection step as special release procedure by QM after the final visual inspection is not installed.

²⁾ Due to the special conditions of the manufacturing processes of LED, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice

Binning Information

Luminous Intensity (mcd)	497 - 500 nm	500 - 503 nm	503 - 506 nm	506 - 509 nm	509 - 511 nm
690 - 920	A10	B10	C10	D10	E10
920 - 1000	A20	B20	C20	D20	E20
1000 - 1140	A30	B30	C30	D30	E30
1140 - 1280	A40	B40	C40	D40	E40

Chip Outlines

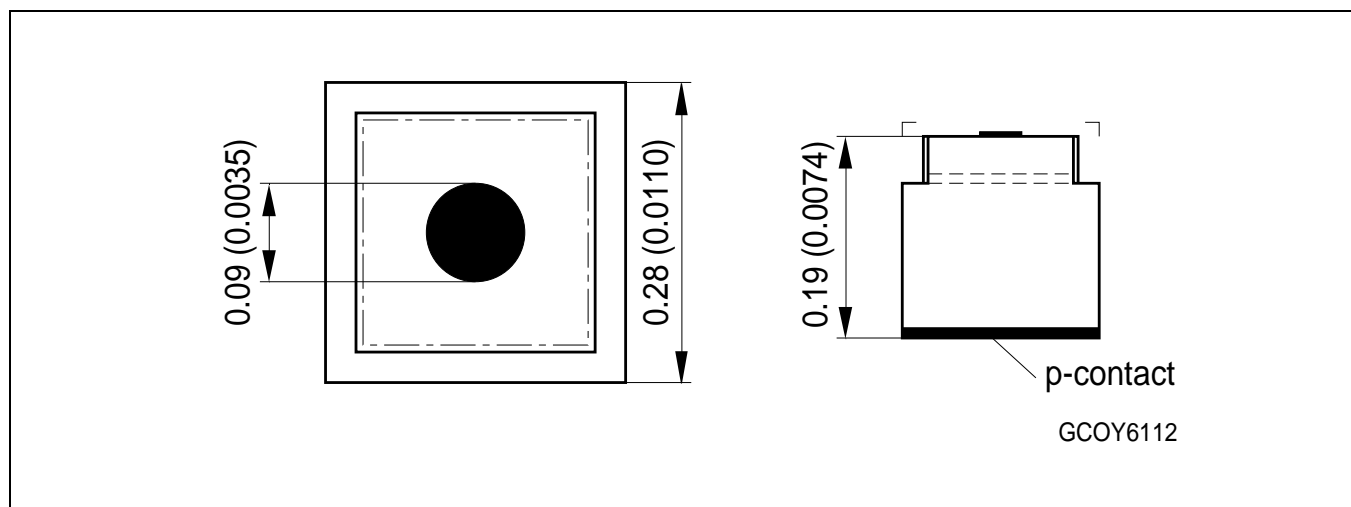

Dimensions are specified as typical¹⁾ values as follows: mm (inch).

Published by OSRAM Opto Semiconductors GmbH

Leibnizstrasse 4, D-93055 Regensburg

© All Rights Reserved.

Attention please!

The information generally describes the type of component and shall not be considered as assured characteristics or detailed specification.

Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances. For information on the types in question please contact our sales organization.

Handling and Storage Conditions:

Storage time for wafers in sealed condition shall not exceed 6 months (storage ambient conditions: $T_a=15\text{...}30^\circ\text{C}$; relative humidity: < 60%). The hermetically sealed shipment lot shall be opened under temperature and moisture controlled cleanroom environment only. Customer has to follow the according rules for disposition of material that can be hazardous for humans and environment.

Chips are placed on a blue foil, which may contain the following substance in a concentration of circ.18% wt:

Bis (2-ethyl(hexyl)phthalate) (DEHP) [CAS #: 117-81-7; EC # 204-211-0].

Dice have to be handled ESD sensitive.

Packing

Chips are placed on a blue foil with minimum size of 18 x 18 cm² or alternatively on a blue foil inside a 6" ring.

For shipment the wafers of a shipment lot are arranged to stacks. The stack is put in a plastic ESD bag with a maximum of 14 wafers in one bag. A maximum of 4 bags is put in a packaging box. A maximum of 5 packaging boxes is put in a shipping carton which is sealed for storage and shipment.

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office.

By agreement we will take packing material back, if it is sorted. You will have to bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Label and shipping documents

Each wafer is identified with a sticker, which is attached to each wafer. The label shows chip type, wafer number, quantity, binning and the minimum, average and maximum values of voltage, luminous intensity and wavelength. Each wafer shipment includes an additional document, which summarizes the content.

Design objectives

a) workability

The chip design was developed and released based on the vendor's standard assembly procedures and packaging.

Bond strength properties are in accordance to MIL-STD-750D, method 2037. Whether the chip fits to the customer's product(c) with its according die and wire bond procedures and packaging must be evaluated by the customer himself. If workability problems arise after this release a mutually conducted problem solving procedure has to be set up, if the chips are suspected of contributing to the problems

b) chip characteristics

The chips are produced by the vendor with best effort, but on chip level a subset of the chip characteristics can be determined only. Performance of the chip in the customer's product(s) can only be determined by the customer himself.

Returns/Complaints

To return material because of technical or logistical reasons a RMA-number is necessary. Samples for analysis purposes can be send to OSRAM OS without credit.

Shipping Conditions:

If not otherwise arranged, the "General Conditions for the supply of products and services of the electrical and electronics industry" apply for any shipment. If these documents are not familiar to you, please request them at our nearest sales office.

Components used in life-support devices or systems must be expressly authorized by us for such purpose!

Critical components²⁾, may only be used in life-support devices or systems³⁾ with the express written approval of OSRAM OS.

Revision History: 2013-09--09

Previous Version: 2012-07-13

Page	Subjects (major change since last revision)	Date of change
6	Binning Table added	2013-09-09

¹⁾ Typical (referred to as typ.) data are defined as long-term production mean values and are only given for information. This is not a specified value.

²⁾ A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.

³⁾ Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health of the user may be endangered.

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；

按照中国的相关法规和标准，不含有毒有害物质或元素。